



Picture is a representation of actual product

**Approvals**




**Order Information**

Load Rating	Part #	Est. Weight	Price
<b>NTEP Certified, 30 ft Cable</b>			
25,000 lb	<b>21649</b>	7 lb	Consult
50,000 lb	<b>21650</b>	7 lb	Consult
100,000 lb	<b>21651</b>	15 lb	Consult
200,000 lb	<b>21652</b>	36 lb	Consult
<b>NTEP Certified, 60 ft Cable</b>			
200,000 lb	<b>188769</b>	40 lb	Consult
<b>Non-NTEP Certified, 30 ft Cable</b>			
10,000 lb	<b>17595</b>	6 lb	Consult
300,000 lb	<b>17597</b>	40 lb	Consult
500,000 lb	<b>17598</b>	40 lb	Consult
<b>OIML, 60 ft Cable</b>			
60 T	<b>194528</b>	15 lb	Consult

**Dimensions**

Rated Capacity	A	B	C	D	E	F	G	H	DEPTH of H
lb/in									
10,000 to 50,000	2.88	3.25	1.28	6.00	2.51	0.40	1.25	1/2-20 UNF	0.38
60 T to 100,000	4.12	5.00	2.15	6.00	3.39	0.51	2.31	3/4-16 UNF	0.56
200,000 to 300,000	6.00	7.25	3.63	17.00	4.26	1.04	3.13	3/4-16 UNF	0.75
500,000	6.50	9.00	4.34	17.00	4.59	0.56	3.69	3/4-16 UNF	0.75

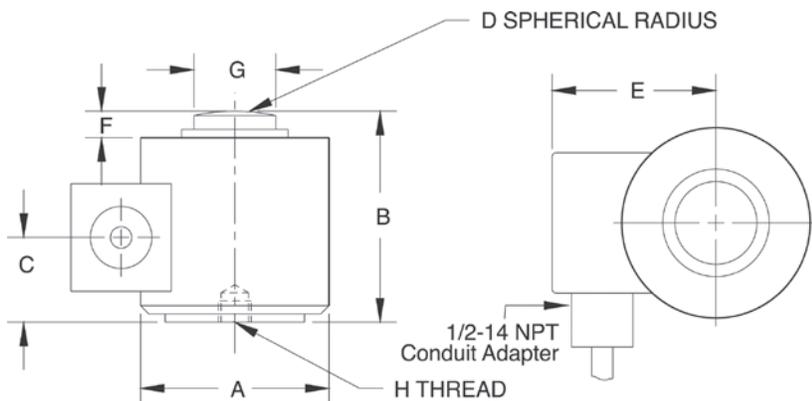

**Interchangeable Products**

- RICE LAKE WEIGHING SYSTEMS
- RLCSP1\*** ..... page 143
- VPG® REVERE
- 692B\*** ..... Discontinued
- ARTECH®
- 90310\***
- HOWE RICHARDSON®
- 244699-000X\***
- STREETER AMET®
- 3760XXX**

\* Load cell diameter may not be identical

**Weigh Module Available**

- RICE LAKE WEIGHING SYSTEMS
- MagnaMount®** ..... page 75

**Specifications**

- Full Scale Output:**  
2 mV/V
- Output Resistance:**  
480 (± 4.8) ohm
- Input Resistance:**  
450 (± 4.5) ohm
- Material/Finish:**  
Stainless steel
- Temperature:**  
Compensated:  
14 °F to 104 °F (-10 °C to 40 °C)  
Operating:  
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**  
Welded-seal, IP68
- Safe Overload:**  
150% full scale
- Rated Excitation:**  
5 to 10 VDC (15 V maximum)
- Combined Error:**  
0.02% full scale (0.05% Non-NTEP Certified)
- Non-repeatability:**  
0.01% full scale
- Insulation Resistance:**  
5,000 megohm
- Deflection at Capacity:**  
10,000 to 50,000 lb: 0.003 in  
100,000 to 300,000 lb: 0.006 in  
500,000 lb: 0.009 in
- Cable Length:**  
30 ft  
60 ft
- Cable Diameter:**  
0.295 in  
Polyurethane jacket
- Cable Color Code:**  
Green +Excitation  
Black -Excitation  
White +Signal  
Red -Signal
- Warranty:**  
One-year limited
- Approvals:**  
NTEP  
cMus  
OIML

**VPG® REVERE**